

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/36	A1	(11) International Publication Number: WO 99/66754 (43) International Publication Date: 23 December 1999 (23.12.99)
(21) International Application Number: PCT/SE99/01052 (22) International Filing Date: 14 June 1999 (14.06.99) (30) Priority Data: 09/097,473 15 June 1998 (15.06.98) US 09/112,689 9 July 1998 (09.07.98) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: ÖSTBERG, Christer; Björkvägen 8, S-245 55 Staffanstorp (SE). JAENECKE, Fredrik; Svartrödersgatan 2, S-223 50 Lund (SE). WANG, Yi-Pin, Eric; 215 Cedarpost, Cary, NC 27513 (US). (74) Agent: ERICSSON MOBILE COMMUNICATIONS AB; IPR Dept., S-221 83 Lund (SE).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: METHOD, APPARATUS, AND SYSTEM FOR FAST BASE STATION SYNCHRONIZATION AND SECTOR IDENTIFICATION <div data-bbox="329 1207 1321 1499"><p>1ST PERCH CHANNEL (16kps) 0.625 ms</p><p>PILOT SYMBOL 4 SYMBOL FOR LOGICAL CHANNEL 5 LONG CODE MASKED SYMBOL 1</p><p>2ND PERCH CHANNEL (16kps) IDLE LONG CODE MASKED SYMBOL 1</p></div> (57) Abstract <p>A method, apparatus, and system perform fast sector identification and base station synchronization. The base station transmits information in primary and secondary control channels to the remote station. The remote station performs synchronization using information in the primary and secondary control channels. A group of identification codes corresponding to the sector is determined using information in the secondary control channel. If this does not result in identification of the sector, an identification code corresponding to the sector is determined from information in the primary control channel. If this does not result in identification of the sector, the sector is identified based on information multiplied with symbols, e.g., pilot symbols, in the primary control channel, without having to decode the BCCH.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

-1-

**METHOD, APPARATUS, AND SYSTEM FOR
FAST BASE STATION SYNCHRONIZATION
AND SECTOR IDENTIFICATION**

5

BACKGROUND

This invention relates to a method, apparatus, and system for fast base station synchronization and sector identification, particularly in a spread spectrum communication system.

10 With the growing trend towards globalization in communications, there has arisen a need for global communication standards. To meet this need, the International Mobile Telecommunications (IMT) 2000 standard is being developed. In the development of the IMT2000 standard, various techniques are under consideration for channel access, including Time Division Multiple Access (TDMA), Wideband Code Division Multiple
15 Access (W-CDMA), and a hybrid of these techniques.

In a TDMA system, each channel is assigned a specific time slot in a periodic train of time intervals over the same frequency. Each period of time slots is called a frame. In a CDMA system, different users, base stations (BS), and services are separated from each other with unique spreading sequences/codes.

20 In one kind of CDMA system, the informational datastream to be transmitted is impressed upon a much higher bit rate datastream generated by a pseudorandom code generator. The informational datastream and the high bit rate datastream are typically multiplied together. This combination of the higher bit rate signal with the lower bit rate datastream is called coding or spreading the informational datastream signal. The rate of
25 the spreading code is referred to as the "chip rate". The chip rate divided by the channel symbol rate is referred to as the "spreading factor" (sf).

A plurality of coded information signals are combined and modulate a radio frequency carrier wave that is transmitted, and the plurality of signals are jointly received as a composite signal at a receiver. In a system in which several users are transmitting

-2-

using different spreading codes, the resulting signal is a composite signal with the different coded signals overlapping both in time and frequency. By correlating the composite signal with one of the unique spreading codes, the corresponding information signal is isolated and decoded. This type of CDMA system is sometimes referred to as a

5 Direct Sequence system.

In another kind of CDMA system, a technique referred to as M-ary Orthogonal Keying (MOK) data modulation is used. According to this technique, one basic spreading function, e.g., a pseudo noise (PN) sequence, is phase modulated on a carrier. The spreading function is modified by other functions, such as Walsh functions, to cause

10 a modulation orthogonal to the basic function and every other modulating function used. The orthogonal keyed data is recovered, e.g., by using parallel decoding devices, such as correlators or convolvers.

In order to set up a connection between a remote station, e.g., a mobile station (MS) or a fixed terminal, and the cellular system, the remote station must identify and

15 synchronize with at least one BS from which the remote station can receive signals and to which the remote station can transmit signals. Each BS may serve one cell with an omnidirectional antenna or with one or more directional antennas. Since the quality of a connection is affected by interference from other users, the cell can be divided into sectors, where each sector is separated from other sectors by a unique or phase-shifted

20 code.

This is illustrated in FIG. 1A which shows a number of BSs 120, each serving at least one cell 100, each cell containing at least one sector 110. For simplicity of illustration, only one cell is shown divided into sectors in FIG. 1A. Each sector antenna is exposed mainly to interference in the direction of the current sector. Thus, using a

25 directional antenna largely avoids interference from other users, increasing the capacity of the cellular system. Due to the division of cells into sectors, the remote station 130 not only needs to identify the BS serving a cell but also the sector of the cell in which the remote station can transmit signals to and receive signals from the BS.

The signal strength of the signal received by the remote station 130 from a

-3-

particular BS 120 may decrease for a number of reasons. For example, if the remote station is mobile, the signal strength may decrease as the remote station moves away from the BS. If the remote station is fixed, the signal strength may decrease if there is a problem at the BS and/or if new users interfere. In such cases, when the signal quality
5 degrades, the remote station may need to be redirected to another BS. This redirection of the connection between the remote station and the BS is referred to as handoff. The performance of the connection between the remote station and the BS can be improved with respect to diversity gain, when the remote station 130 is connected to more than one BS at the same time. This can be referred to as macrodiversity. It may also be necessary
10 to redirect a connection between a remote station and a particular BS to another sector served by the same BS. This is sometimes referred to as softer handoff. For handoff to be effective, the remote station must be able to identify a new sector and BS to which its connection will be redirected and to synchronize with the BS serving that sector. Ideally, handoff should be unnoticed (seamless) to the user.

15 FIG. 1B illustrates a basic frame structure of a downlink informational datastream for a communication system, such as a system according to the developing IMT2000 standard. A frame may include sixteen slots and a total of 40960 complex chips, i.e., 40960 Q-ary symbols of the high rate coded signal. Each slot may include a number of pilot symbols and a varying number of information symbols determined by the current
20 spreading factor (sf). The pilot symbols can be used by a receiver, for example, to perform channel estimation. Each slot may include 2560 chips.

Further details regarding the frame and channel structure for the IMT2000 standard are described in IMT-2000 Study Committee Air-interface WG, SWG2, "Volume 3 Specifications of Air-interface for the 3G Mobile System", Ver. 0-3. 1, Dec.
25 1997 and in "UTRA Physical Layer Description FDD parts (vo. 1, 1998-4-24)", ETSI SMG2 UMTS Physical Layer Expert Group, Tdoc SMG2 UMTS-L1 56/98, Meeting 2, Paris, France, April 28, 1998, which are expressly herein incorporated by reference.

Referring again to FIG. 1A, a BS 120 can transmit signals to one or more remote stations 130 as a single (composite) signal. The signal directed to a remote station 130 is

-4-

typically spread with a Short Code that is orthogonal or mostly orthogonal to a Short Code that is used to spread the signal directed to another remote station 130. These signals are then scrambled with a second code that is sometimes referred to as a Long Code, associated with a particular BS 120. The sum of a plurality of spread and
5 scrambled signals is then transmitted by the BS 120.

When a remote station 130 receives the composite signal, the remote station multiplies the spread signal with the Long Code and the Short Code to recreate the signal directed to that remote station, and the signal directed to the other remote station is suppressed as interference noise. Similarly, the other remote station multiplies the spread
10 signal with the Long Code and the Short Code assigned to it to recreate the signal directed to it, and the signal directed to the other remote station is suppressed as interference noise. The receivers associated with the remote stations 130 must have acquired various levels of synchronization to the received signal, in addition to learning or knowing the applicable Long and Short Codes, in order to implement despreading,
15 demodulation, and decoding of the information residing in that signal.

For downlink synchronization to the remote station 130, each BS 120 periodically transmits primary and secondary synchronization codes, for example, a Primary Synchronization Code (PSC) and a Secondary Synchronization Code (SSC) (or a Primary Synchronization Channel (SCH) and a Secondary SCH according to a developing ETSI
20 standard) in downlink physical channels. For ease of explanation, reference will be made to the PSC and the SSC. For base station identification, the downlink information includes the Long Code. The Long Code is cyclically repeated every frame, i.e., the Long Code resets for each frame.

The PSC and the SSC are transmitted in primary and secondary control channels,
25 e.g., a Perch 1 channel and a Perch 2 channel (or a Primary Common Control Physical Channel (CCPCH) and a Secondary CCPCH according to a developing ETSI standard), respectively. For ease of explanation, reference will be made to Perch 1 and Perch 2 channels. A Perch channel is a one-way physical channel from the BS to the remote station that the remote station uses, for example, for received signal strength

-5-

measurement and cell selection. FIG. 2A illustrates the timeslot format of Perch 1 and Perch 2 channels. The duration of a timeslot may be, for example, 0.625 msec.

In the Perch 1 channel, which is a broadcast channel, each slot includes four pilot symbols and five information symbols. These nine symbols are scrambled by the Long Code. The Long Code may be an extended Gold Code. The remaining symbol is a Long Code Mask Symbol (LCMS). This symbol is Long Code Masked, i.e., it is not scrambled by the Long Code. Instead, the LCMS in the Perch 1 channel includes the PSC. The LCMS in the Perch 1 channel may comprise 256 chips arranged in a pattern such as an extended Gold sequence.

10 In the Perch 2 channel, which is also a broadcast channel, there are nine "idle" symbols, i.e., nine symbols in which no information is transmitted, and one LCMS. None of the symbols in the Perch 2 channel are scrambled by the Long Code. The LCMS in the Perch 2 channel includes the SSC.

A more detailed description of the PSC and the SSC is given in a copending and commonly assigned U.S. Patent Application No. 08/921,135, filed August 29, 1997, in the names of Karim Jamal et al., which is expressly herein incorporated by reference.

A logical Broadcast Control Channel (BCCH) is mapped, for example, to the information symbols in the Perch 1 channel. The BCCH is broadcast from all sectors to the remote stations to deliver cell-specific information, e.g., cell identification and sector identification, and system-related information, e.g., transmit power, uplink interference power, etc. Sector identification has conventionally been performed by decoding and deinterleaving the BCCH symbols. Since the BCCH symbols also contain information that is not necessary for sector identification, e.g., power information, this conventional method for sector identification consumes an unnecessarily large amount of processing time and resources.

25 In order to establish or redirect a connection with a base station, the remote station needs to identify the sector to which the connection is to be redirected or in which the connection is to be established. The remote station 130 also needs to know both the slot and frame boundaries of the downlink informational datastream, for synchronization with

-6-

the timing reference of the BS. For effective and seamless handoff between sectors, synchronization and identification should be performed as fast as possible, with a minimum amount of effort.

5

SUMMARY

It is therefore an object of the present invention to identify a sector to which a connection with a remote station is to be redirected or in which a connection with a remote station is to be established and to synchronize the remote station with the timing reference of the BS serving that sector as fast as possible and with a minimum effort for the remote station.

10

This and other objects are met by a method, apparatus, and system for identifying a sector to which a connection with a remote station is to be redirected or in which a connection with a remote station is to be established and synchronizing the remote station to the BS serving the sector.

15

According to exemplary embodiments, the base station transmits information in primary and secondary control channels to the remote station. The remote station performs synchronization using information in the primary and secondary control channels. A group of identification codes corresponding to the sector is determined using information in the secondary control channel. If this does not result in identification of the sector, an identification code corresponding to the sector is determined from information in the primary control channel. If this does not result in identification of the sector, e.g., because different sectors share the same identification code, the sector is identified based on information multiplied with symbols, e.g., pilot symbols, in the primary control channel, without having to decode the BCCH.

20

25

According to exemplary embodiments, the secondary control channel carries a sequence of symbols repeated in every frame, e.g., a sequence of symbols from a binary, Q-ary, or M-ary alphabet. According to a first embodiment, the sequence of symbols is from an m-sequence. According to a second embodiment, the sequence of symbols is from a group of (16,2) Reed Solomon (RS) code words. According to a third

-7-

embodiment, the sequence of symbols is from a group of (16,3) RS code words. According to a fourth embodiment, the sequence of symbols is from a group of (16,4) RS code words. The sequence of symbols can also be taken from other types of code word groups, e.g., Hamming code word groups.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the invention will become apparent by reading this description in conjunction with the accompanying drawings, in which like reference numerals refer to like elements and in which:

- 10 FIG. 1A illustrates an exemplary W-CDMA communication system;
 FIG. 1B illustrates a basic frame structure of a downlink informational datastream according to a proposed IMT2000 standard;
 FIG. 2A illustrates a timeslot format of a Perch 1 channel and a Perch 2 channel;
 FIG. 2B illustrates a frame structure of a Perch 1 channel and a Perch 2 channel
15 according to exemplary embodiments of the invention;
 FIG. 3A illustrates a portion of the Perch 1 channel to which a BCCH is mapped according to exemplary embodiments of the invention;
 FIG. 3B illustrates differential encoding and multiplication of pilot symbols according to exemplary embodiments of the invention;
20 FIG. 4 illustrates a method for sector identification and synchronization according to exemplary embodiments of the invention.

DETAILED DESCRIPTION

For illustrative purposes, the following description is directed to methods for
25 sector identification and base station synchronization in a W-CDMA system employing a standard such as the developing IMT2000 standard. The invention is not limited to this type of system, however, but is applicable to any type of communication system.

According to exemplary embodiments of the invention, sector identification and BS synchronization are provided, at least in part, by the PSC and the SSC. The PSC and

-8-

the SSC can be carried in the Perch 1 channel and the Perch 2 channel, respectively.

The PSC may be used to identify a Long Code and for slot synchronization. For slot synchronization, the downlink information received by the remote station 130 is applied to a filter matched to the PSC, and the output of the matched filter has peaks
5 corresponding to the reception times of the PSCs. From these peaks, the BS timing reference can be determined.

The SSC may be used, for example, to identify a Long Code Group (LCG) corresponding to one or more Long Codes and to identify the frame boundary.

FIG. 2B illustrates the frame structure of the Perch 1 and Perch 2 channels
10 including a PSC and an SSC, respectively, according to an exemplary embodiment of the invention. Since there are sixteen slots in each frame, there are sixteen LCMSs in each frame, one included in each slot. The LCMSs in the Perch 1 channel include the PSC, and the LCMSs in the Perch 2 channel include the SSC.

As represented by the "1's" in FIG. 2B, the PSC is the same in all slots, and the
15 PSC sequence across the slots in a frame is the same for all the BS's.

The SSC is not the same in all slots, and the sequence of SSCs across the slots in a frame is not the same for all the BS's. Each slot in a frame of the Perch 2 channel may contain a different symbol for the SSC. The SSC in each slot may be one of several different symbols in a multisymbol alphabet containing, e.g., 17 different symbols, e.g.,
20 1, 2, ... 17. Each symbol is mapped, e.g., to a 256 chip extended Gold sequence. For example, as shown in FIG. 2B, in one slot the LCMS in the Perch 2 channel may carry a 17 as the SSC, in the next slot the LCMS in the Perch 2 channel may carry a 3 as the SSC, etc. The SSCs in the slots in a frame form a sequence which is cyclically repeated for each frame. Thus, although the SSCs are not the same in each slot, the sequence of
25 SSCs across a frame is repeated in each frame.

Synchronization of the remote station to the PSC results in slot synchronization. Since the PSC and SSC are positioned at the same place in the slot, synchronization to the PSC results in synchronization with the SSC.

In order to avoid the need for the remote station to decode the BCCH symbols for

-9-

sector identification, which is required in conventional sector identification, two methods are described. According to the first method, a unique Long Code is assigned to each sector. According to the second method, all sectors served by a BS are assigned the same Long Code, but the Long Codes received by the remote station are shifted, e.g., phase-shifted, with respect to each other. Information regarding how the Long Codes are shifted with respect to each other can be provided by multiplying the pilot symbols across a sequence of slots in the Perch 1 channel. Different sequences of information can be multiplied by the pilot symbols to identify the sectors.

FIG. 3A shows the pilot symbols across a sequence of slots in the Perch 1 channel being multiplied by a sequence of symbols. In the example shown in FIG. 3A, the frame is divided into sequences of four slots. The pilot symbols in the "1st" slot are multiplied by a first symbol in a sequence, the pilot symbols in the "2nd" slot are multiplied by a second symbol in a sequence, and so on. The sequence of symbols multiplied by the pilot symbols identifies a particular sector. Using a binary symbol alphabet for each symbol, a four symbol long sequence can differentiate sixteen sectors. For example, one sector can be identified by the sequence 0001 multiplied across the pilot symbols in the four slots, another sector can be identified by the sequence 0010 multiplied across the pilot symbols in the four slots, etc.

According to another approach, the sequence multiplied across the pilot symbols in the Perch 1 channel can be differentially encoded in order to avoid carrier phase synchronization. The first pilot symbol in every slot can be used as reference. Then, assuming there are four pilot symbols in a slot, three differential encodings per slot can be achieved.

For example, let $(v_0, v_1, \dots, v_{14})$ be an m-sequence of length 15. The multiplication values for the pilot symbols in all the slots in a frame, using differential encoding, are shown in FIG. 3B. Thus, with five slots, an m-sequence of fifteen with fifteen cyclical shifts makes it is possible to identify up to fifteen sectors, each cyclical shift identifying one sector.

FIG. 4 illustrates an exemplary method for synchronization and sector

-10-

identification according to the present invention. The method begins at step 410, at which initial synchronization, e.g., slot synchronization to the PSC, is performed by the remote station. This operation may be performed by filtering a signal received at the remote station, e.g., in a conventional receiver, from the BS through, for example, a sliding correlator, i.e., a filter matched to the PSC. This provides the slot timing. A Finite Impulse Response (FIR) filter having 256 taps and an accumulator may be used for this purpose. It will be appreciated that other types of arrangements may be used for slot synchronization, for example, a group of 256 parallel correlators and an integrator.

Next, at step 420, the frame boundary is detected, and a Long Code Group (LCG) is identified from the SSC. The LCG identifies a subset of all the Long Codes. For example, if there are 512 Long Codes, there may be 32 LCGs, each LCG corresponding to a group of 16 Long Codes.

Step 420 requires correlation of the received signal against a set of possible SSCs. This step may be performed by a bank of correlators and accumulators.

Identification of the LCG in step 420 may result in identification of the sector, as explained in more detail below. If the sector is not identified in step 420, the Long Code is identified in step 430 by correlation of the Long Codes in the Perch 1 channel against the possible Long Codes in the corresponding LCG. This may be performed by, for example, a correlator and an accumulator. Of course, if the Long Code is identified in step 420, step 430 is not necessary. If each sector is assigned a unique Long Code, step 430 results in identification of the sector.

If more than one sector is assigned the same Long Code, correlation of the received signal against the pilot symbols in the Perch 1 channel and subsequent detection of the sequence multiplied with the pilot symbols across a sequence of slots are performed in step 440 to identify the sector. This step may be performed using, for example, a correlator and an accumulator.

The components for performing each of the steps shown in FIG. 4 can be implemented by, for example, a processor in an Application Specific Integrated Circuit (ASIC) which can be included in a remote station such as the remote station 130 shown in

FIG. 1A.

Four different embodiments are described to handle synchronization and sector identification. For illustrative purposes, it is assumed that 128 BS's, each serving 10 sectors, are used.

5 The initial synchronization performed in step 410 is common to all the embodiments. The amount of effort required for each of the remaining steps 420, 430, and 440 varies among the embodiments, and, in fact, some of these steps are not performed at all in some of the embodiments.

10 According to exemplary embodiments, the sequence of SSC symbols across the timeslots in a frame can be multiplied by a sequence of symbols from a binary, Q-ary, or M-ary alphabet.

For example, according to a first embodiment, the sequence of SSC symbols across the timeslots in a frame is multiplied by an extended "m-sequence" of length 16. This type of frame sequence, which has good auto-correlation properties and is widely used in, e.g., spread spectrum communications, is described, for example, in the above-
15 referenced U.S. Patent Application No. 08/921,135.

According to this embodiment, both the LCG and the frame boundary indication are included in the SSC sequence. The code number of the SSC reflects the LCG, and information multiplied with the SSC reflects the frame timing boundary.

20 For example, for a system employing Binary Phase Shift Keying (BPSK), the sixteen SSC symbols in a frame can be multiplied by a predetermined sixteen element sequence. Thus, the SSC symbol in the first slot can be multiplied by the first element of the sequence, the SSC symbol in the second slot can be multiplied by the second element in the sequence, and so on. This provides the frame boundary indication. The remote
25 station can relatively easily find the frame synchronization, e.g., based on sixteen consecutive correlations.

This technique may also be applied in other types of systems, e.g., Quadrature Phase Shift Keying (QPSK) systems.

According to the first embodiment, the Long Code is identified in step 430 by

-12-

correlating the received signal with all the Long Codes in the identified LCG. Assuming that each Long Code does not uniquely identify a sector, the sector identity can be provided by multiplying the pilot symbols across a sequence of slots in the Perch 1 channel with different sequences, as described above with reference to FIG. 3. Thus, according to this embodiment, the sector is identified in step 440 by correlation with the pilot symbols in the Perch 1 channel and by subsequent detection of the multiplied sequence.

According to a second embodiment, the sequence of SSC symbols in a frame can be multiplied by a group of (16,2) Reed Solomon (RS) code words. Frame boundary indication is provided in a manner similar to the first embodiment, e.g., by multiplying the SSC with frame boundary information. The (16,2) RS code has 17 comma-free code words with unique cyclical shifts. Since there are not enough comma-free (16,2) RS code words to uniquely identify all 1280 sectors, in this embodiment, steps 420 and 430 are performed in a similar manner as in the first embodiment. In other words, the code number of the SSC identifies the LCG, and Long Code is determined by correlation of the received signal against all the possible Long Codes in the identified LCG.

In the second embodiment there is a larger symbol alphabet available for the SSC. Thus, step 420 in the second embodiment is more extensive than in the first embodiment. Also, step 420 in the second embodiment requires decoding of the RS code by an RS decoder.

Assuming that each Long Code does not uniquely identify a sector, the sector can be identified in step 440, as in the first embodiment. Of course, in both the first and the second embodiments, the sectors and cells may be planned such that the LCG's are assigned in a clustered manner, so that sectors having the same Long Code are a long way from each other. In this case, the Long Code may unambiguously identify a sector in a limited area, i.e., an area within a cluster of cells, and step 440 is not required.

According to a third embodiment, the sequence of SSC symbols in a frame may be multiplied by a group of (16,3) RS code words. The (16,3) RS code has 289 comma-free code words with unique cyclical shifts. Thus, the code number of a SSC symbol can

-13-

be one of 289 numbers, each specifying a particular LCG. Using only 256 of the code words, each LCG can then correspond to five Long Codes to specify 1280 Long Codes, each Long Code corresponding to a particular sector. Thus, there is no need to perform step 440. Steps 420 and 430 are similar to that in the second embodiment. Due to the
5 large number of LCGs, proper cell and sector planning exclude the need to perform step 430. In other words, the sectors can be planned such that the sectors having the same LCG are a long distance away from each other so that it is highly unlikely that a signal is received from both sectors by the same remote station. Identifying the LCG correspondingly also identifies the sector, so there is no need to perform step 430.

10 According to a fourth embodiment, the sequence of SSC symbols in a frame may be multiplied by a group of (16,4) RS code words. This corresponds to 5202 comma-free code words. In the interest of simplicity, i.e., to simplify the RS decoding, the number of code words can be reduced to 1280. Step 420 is performed in a similar manner to the second and third embodiments. Because there are enough code words to uniquely
15 identify each sector (at least within the limited area of the 10 base stations), identification of a code word then gives the Long Code identity and thus also the sector identification, without any need to perform steps 430 or 440.

Although m-sequences and RS codes are described above, it will be appreciated that the SSC symbols in a frame may be multiplied by other types of sequences or codes,
20 e.g., linear codes such as Hamming codes or Kerdock codes.

According to exemplary embodiments of the present invention, a method, apparatus, and system are provided for identifying a sector from which a remote station desires to communicate with a BS and for synchronizing the remote station with the BS. An advantage of the invention is that the identification of the sector is provided, without
25 requiring the remote station to decode the BCCH. Various modifications of the SSC are provided in order to include more detailed identification parameters about the BS. Also, the pilot symbols in the portion of the physical Perch 1 channel corresponding to the BCCH can be multiplied with sector identification information.

Although described above with reference to particular embodiments, it will be

-14-

appreciated by those of ordinary skill in the art that this invention can be embodied in other specific forms without departing from its essential character. For example, although described with reference to a CDMA system, the present invention is also applicable in systems using different techniques for channel access, e.g., a TDMA system or a hybrid CDMA-TDMA system. Also, although reference is made to Perch 1 and 2 channels and PSCs and SSCs, the invention is applicable to any type of primary and secondary control channels and primary and secondary synchronization codes, e.g., the Primary CCPCH, Secondary CCPCH, Primary SCH, and Secondary SCH according to the developing ETSI standard. The embodiments described above should therefore be considered in all respects to be illustrative and not restrictive.

-15-

WHAT IS CLAIMED IS:

1. In a communication system including at least one remote station and at least one base station serving a cell containing at least one sector, the base station transmitting information to the remote station in primary and secondary control channels,
- 5 a method for identifying a sector in which a connection to the remote station is to be established or to which a connection to the remote station is to be redirected, the method comprising the steps of:

- determining a group of identification codes corresponding to the sector using information in the secondary control channel;
- 10 if determining the group of identification codes does not result in identification of the sector, determining an identification code corresponding to the sector based on information in the primary control channel; and
- if determining the identification code does not result in identification of the sector, identifying the sector based on information multiplied with symbols in the
- 15 primary control channel.

2. The method of claim 1, wherein the sector is identified based on information multiplied with pilot symbols in the primary control channel, without having to decode a Broadcast Control Channel (BCCH).
- 20

3. The method of claim 1, further comprising a step of performing synchronization in the remote station using information in the primary and secondary control channels.

- 25 4. The method of claim 1, wherein each sector within a limited area is assigned a unique identification code, and determining the identification code results in identification of the sector, without having to decode a Broadcast Control Channel (BCCH).

-16-

5. The method of claim 1, wherein sector identification is provided by information in the primary and secondary control channels, without having to encode a Broadcast Control Channel (BCCH).

5 6. The method of claim 1, wherein multiple sectors are assigned the same identification code but are assigned different information multiplied with the symbols in the primary control channel.

7. The method of claim 1, wherein the secondary control channel carries a
10 sequence of symbols from a binary, Q-ary, or M-ary alphabet repeated every frame.

8. The method of claim 7, wherein the sequence of symbols is from an m-sequence, a group of (16,2) Reed Solomon (RS) code words, a group of (16,3) Reed Solomon (RS) code words, a group of (16,4) Reed Solomon (RS) code words, or a group
15 of linear code words.

9. The method of claim 8, wherein for a group of (16,3) RS code words, determining the identification code results in identifying the sector, and for a group of (16,4) RS code words, determining the group of identification codes results in identifying
20 the sector.

10. The method of claim 1, wherein said information is transmitted using time divisional multiple access techniques, code divisional multiple access techniques, or a hybrid of both techniques.

25

11. In a communication system in which primary and secondary control channels are transmitted from at least one base station serving a cell containing at least one sector to a remote station, and apparatus for identifying a sector in which a connection is to be established or to which a connection is to be redirected, the apparatus

-17-

comprising:

means for determining an identification code group corresponding to the sector based on information in the secondary control channel;

5 means for determining an identification code from information in the primary control channel if the determination of the identification code group does not result in identification of the sector; and

means for identifying the sector based on information multiplied with symbols in the primary control channel if determination of the identification code does not result in identification of the sector.

10

12. The apparatus of claim 11, wherein the sector is identified based on information multiplied with the pilot symbols in the primary control channel, without having to decode a Broadcast Control Channel (BCCH).

15

13. The apparatus of claim 11, further comprising means for synchronizing the remote station with the base station using information in the primary and secondary control channels.

20

14. The apparatus of claim 11, wherein each sector is assigned a unique identification code, and determining the identification code results in identification of the sector, without having to decode a Broadcast Control Channel (BCCH).

25

15. The apparatus of claim 11, wherein sector identification is provided by information in the primary and secondary control channels, without having to encode a Broadcast Control Channel (BCCH).

16. The apparatus of claim 11, wherein multiple sectors within a limited area are assigned the same identification code but are assigned different information multiplied with the symbols in the primary control channel.

-18-

17. The apparatus of claim 11, wherein the secondary control channel carries a sequence of symbols from a binary, Q-ary, or M-ary alphabet repeated every frame.

18. The apparatus of claim 17, wherein the sequence of symbols is from an m-
5 sequence, a group of (16,2) Reed Solomon (RS) code words, a group of (16,3) Reed Solomon (RS) code words, a group of (16,4) Reed Solomon (RS) code words, or a group of linear code words.

19. The apparatus of claim 18, wherein for a group of (16,3) RS code words,
10 determining the identification code results in identifying the sector, and for a group of (16,4) RS code words, determining the group of identification codes results in identifying the sector.

20. The apparatus of claim 11, wherein said information is transmitted using
15 time divisional multiple access techniques, code divisional multiple access techniques, or a hybrid of both techniques.

21. A communication system comprising:
at least one remote station;
20 at least one base station serving a cell containing at least one sector,
wherein the at least one base station transmits primary and secondary control channels to the at least one remote station; and
a processor for identifying a sector in which a connection is to be established or to which a connection is to be redirected, wherein the processor determines
25 an identification code group corresponding to the sector based on information in the secondary control channel, determines an identification code from information in the primary control channel if the determination of the identification code group does not result in identification of the sector, and identifies the sector based on information multiplied with symbols in the primary control channel if determination of the

-19-

identification code does not result in identification of the sector.

22. The communication system of claim 21, wherein the sector is identified based on information multiplied with the pilot symbols in the primary control channel,
5 without having to decode a Broadcast Control Channel (BCCH).

23. The communication system of claim 21, further comprising means for synchronizing the remote station with the base station using information in the primary and secondary control channels.

10

24. The communication system of claim 21, wherein each sector is assigned a unique identification code, and determining the identification code results in identification of the sector, without having to decode the Broadcast Control Channel (BCCH).

15

25. The communication system of claim 21, wherein sector identification is provided by information in the primary and secondary control channels, without having to encode a Broadcast Control Channel (BCCH).

20

26. The communication system of claim 21, wherein multiple sectors within a limited area are assigned the same identification code but are assigned different information multiplied with the symbols in the primary control channel.

27. The communication system of claim 21, wherein the secondary control
25 channel carries a sequence of symbols from a binary, Q-ary, or M-ary alphabet repeated every frame.

28. The communication system of claim 27, wherein the sequence of symbols is from an m-sequence, a group of (16,2) Reed Solomon (RS) code words, a group of

-20-

(16,3) Reed Solomon (RS) code words, a group of (16,4) Reed Solomon (RS) code words, or a group of linear code words.

29. The communication system of claim 28, wherein for a group of (16,3) RS
5 code words, determining the identification code results in identifying the sector, and for a
group of (16,4) RS code words, determining the group of identification codes results in
identifying the sector.

30. The communication system of claim 21, wherein said information is
10 transmitted using time divisional multiple access techniques, code divisional multiple
access techniques, or a hybrid of both techniques.

1/4

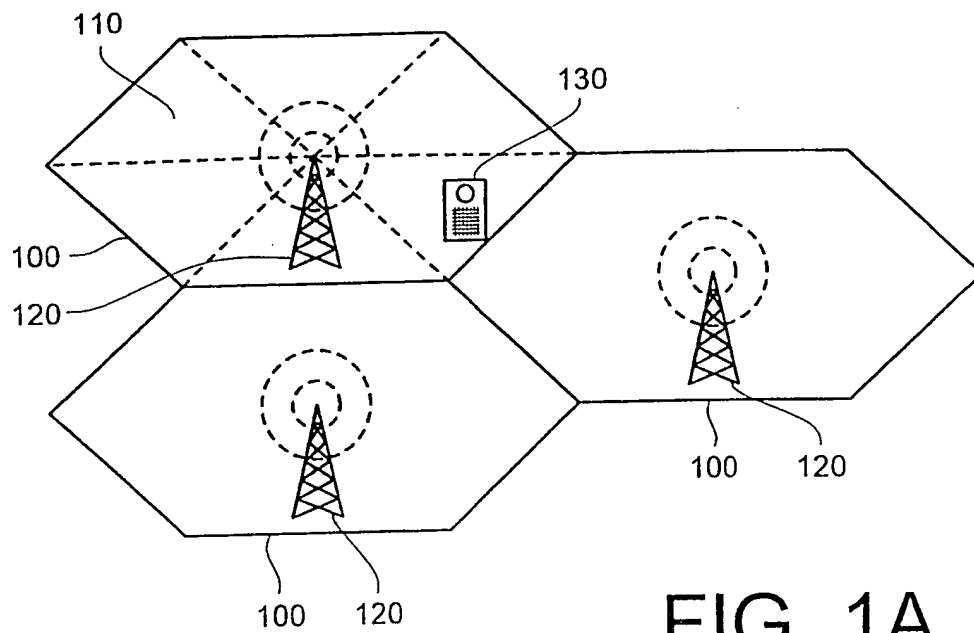


FIG. 1A

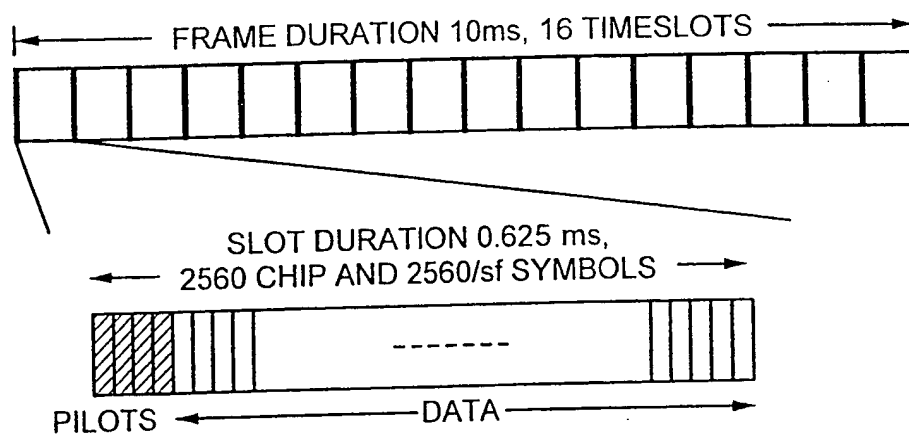


FIG. 1B

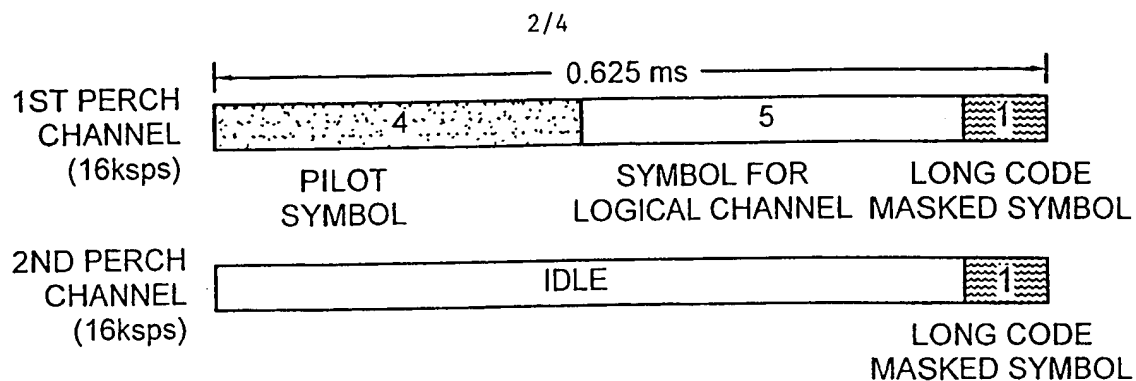


FIG. 2A

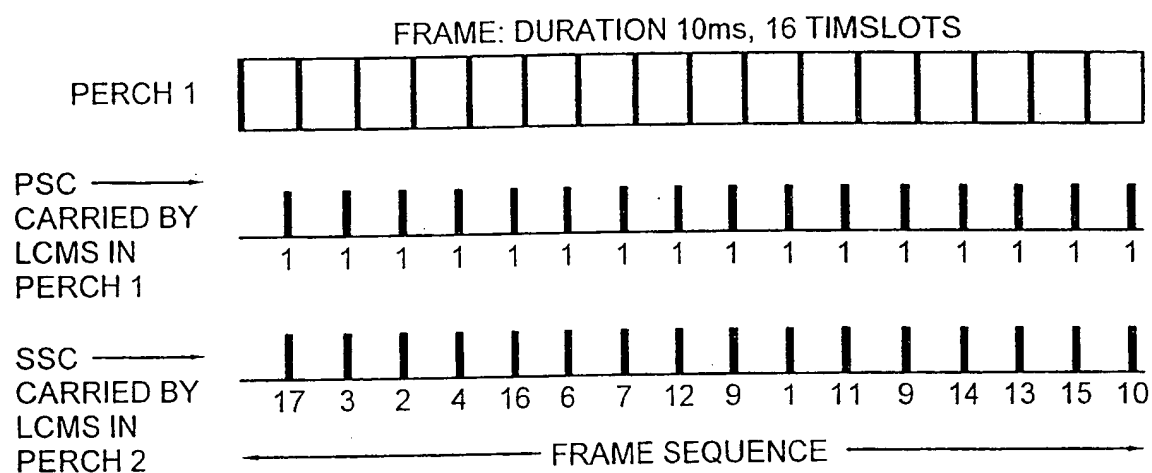


FIG. 2B

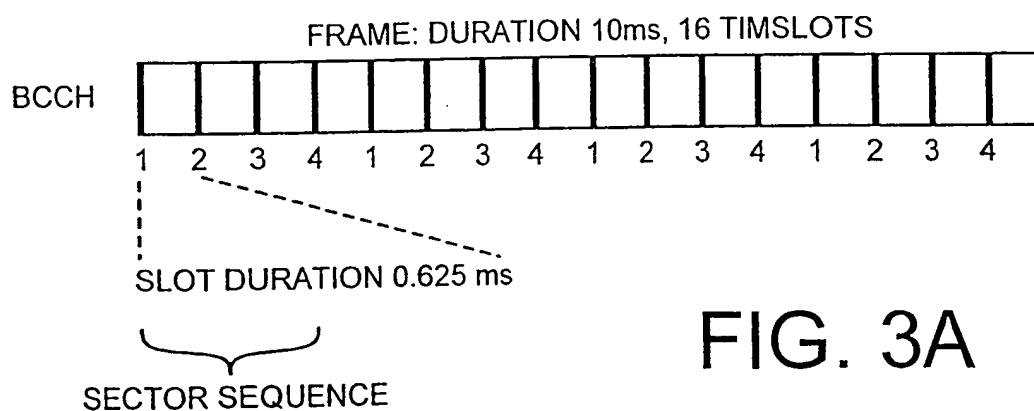


FIG. 3A

SLOT 0				SLOT 1			
1	V_0	V_0V_1	$V_0V_1V_2$	1	V_3	V_3V_4	$V_3V_4V_5$
SLOT 2				SLOT 3			
1	V_6	V_6V_7	$V_6V_7V_8$	1	V_9	V_9V_{10}	$V_9V_{10}V_{11}$
SLOT 4				SLOT 5			
1	V_{12}	$V_{12}V_{13}$	$V_{12}V_{13}V_{14}$	1	V_0	V_0V_1	$V_0V_1V_2$
SLOT 6				SLOT 7			
1	V_3	V_3V_4	$V_3V_4V_5$	1	V_6	V_6V_7	$V_6V_7V_8$
SLOT 8				SLOT 9			
1	V_9	V_9V_{10}	$V_9V_{10}V_{11}$	1	V_{12}	$V_{12}V_{13}$	$V_{12}V_{13}V_{14}$
SLOT 10				SLOT 11			
1	V_0	V_0V_1	$V_0V_1V_2$	1	V_3	V_3V_4	$V_3V_4V_5$
SLOT 12				SLOT 13			
1	V_6	V_6V_7	$V_6V_7V_8$	1	V_9	V_9V_{10}	$V_9V_{10}V_{11}$
SLOT 14				SLOT 15			
1	V_{12}	$V_{12}V_{13}$	$V_{12}V_{13}V_{14}$	1	1	1	1

FIG. 3B

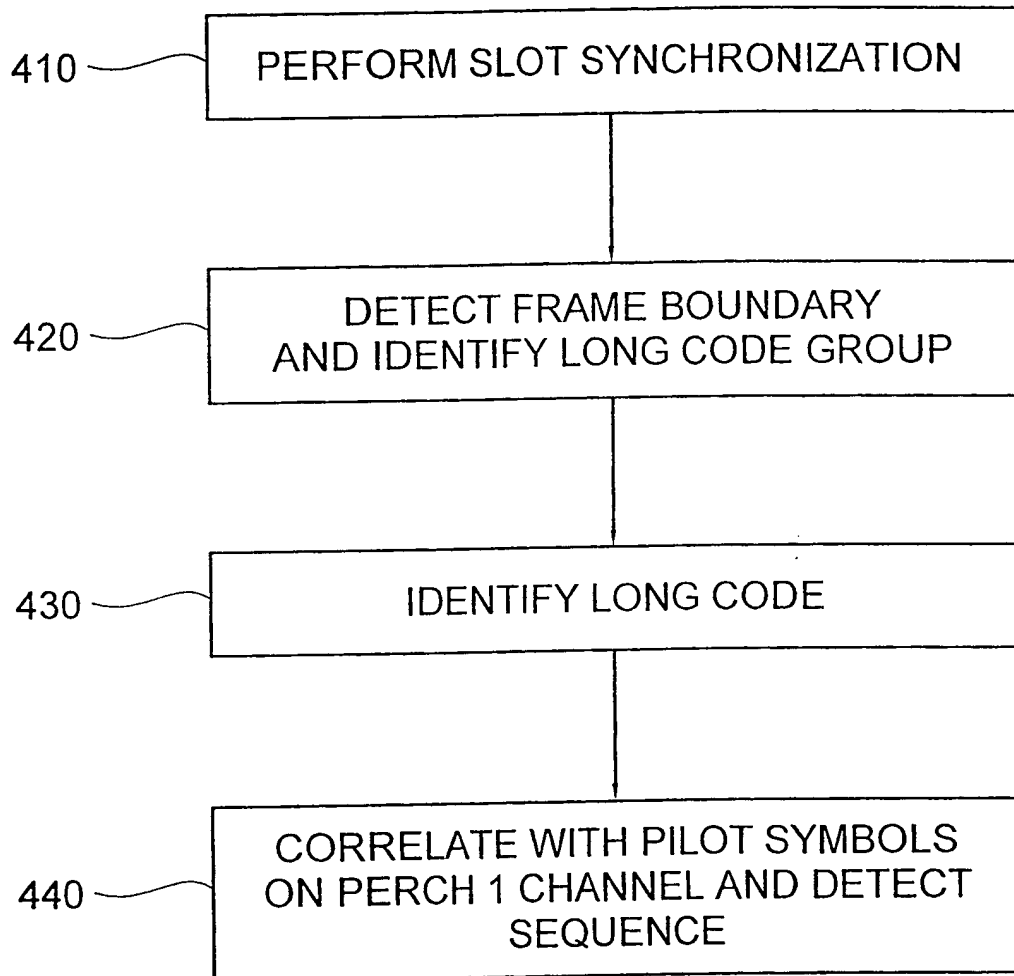


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/01052

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 797 369 A (NIPPON TELEGRAPH & TELEPHONE) 24 September 1997 (1997-09-24) column 3, line 22 - line 44 column 17, line 4 - line 12 claim 11; figures 1,15 ---	1,11,21
A	US 5 230 081 A (ONOE SEIZO ET AL) 20 July 1993 (1993-07-20) column 3, line 26 - line 52 column 7, line 23 - line 55 column 11, line 55 - column 12, line 23 figures 4A,4B,14,15 ---	1,11,21
A	EP 0 693 834 A (NIPPON TELEGRAPH & TELEPHONE) 24 January 1996 (1996-01-24) column 34, line 10 - line 34; figures 10,12,18,22 --- -/--	1,11,21



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 August 1999

Date of mailing of the international search report

08/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Cochet, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/01052

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>KLEIN A AND AL: "FRAMES MULTIPLE ACCESS MODE 1-WIDEBAND TDMA WITH AND WITHOUT SPREADING"</p> <p>IEEE INTERNATIONAL SYMPOSIUM ON PERSONAL, INDOOR AND MOBILE RADIO COMMUNICATIONS, vol. 1, 1 September 1998 (1998-09-01), pages 37-41, XP002085885</p> <p>page 37, column 1, line 41 - column 2, line 15</p> <p style="text-align: center;">---</p>	<p>1,10,11, 20,21,30</p>
A	<p>OVESJO F AND AL: "FRAMES MULTIPLE ACCESS MODE 2-WIDEBAND CDMA"</p> <p>IEEE INTERNATIONAL SYMPOSIUM ON PERSONAL, INDOOR AND MOBILE RADIO COMMUNICATIONS, vol. 1, 1 September 1997 (1997-09-01), pages 42-46, XP002085886</p> <p>page 44, paragraph 6</p> <p>page 42, column 2, line 3 - line 16</p> <p style="text-align: center;">-----</p>	<p>1,8-11, 18-21, 28-30</p>

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/SE 99/01052

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0797369 A	24-09-1997	CA 2200518 A	21-09-1997
		CN 1165459 A	19-11-1997
		JP 9312885 A	02-12-1997
US 5230081 A	20-07-1993	JP 2873320 B	24-03-1999
		JP 3104430 A	01-05-1991
		DE 69023118 D	23-11-1995
		DE 69023118 T	27-06-1996
		EP 0446363 A	18-09-1991
		WO 9104616 A	04-04-1991
EP 0693834 A	24-01-1996	US 5673260 A	30-09-1997
		CN 1124552 A	12-06-1996
		WO 9522213 A	17-08-1995
		JP 2801967 B	21-09-1998